


GEYER


Philapack, LLC

Flo-Master Jr

PISTON-TYPE FILLING MACHINES

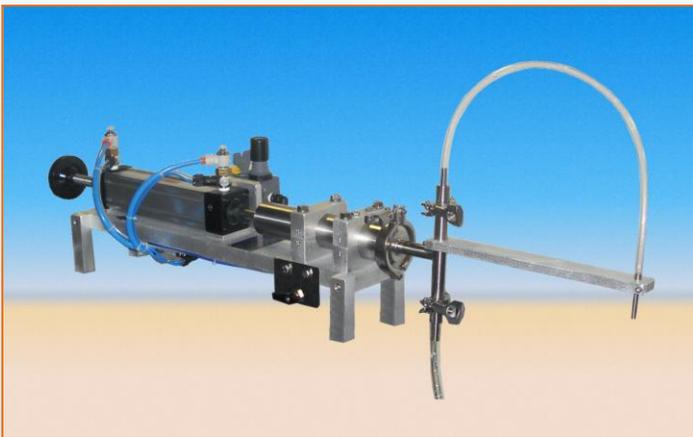

1 Cylinder Table Top Model

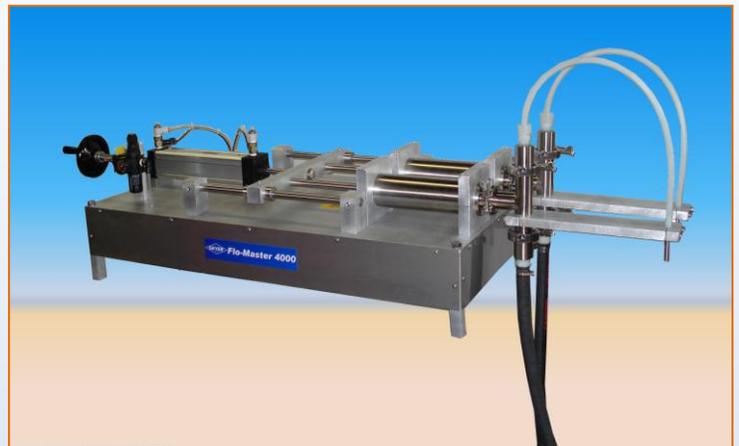

2 Cylinder Table Top Model


- *will fill water thin to medium viscosity homogeneous products*
- *all pneumatic*
- *accuracy of fill plus or minus ½ of 1 percent by volume*
- *entire construction with stainless materials*
- *quick and easy to clean and changeover*
- *available in Junior (up to 8 oz.), Quart (up to 36 oz.), ½ gal., gallon models*
- *can be conveyORIZED, multiple nozzle model also available*

DESCRIPTION:

This machine is compact and very simple in design and operation. The Flo-Master 4000 will fill thin liquids as well as medium viscous products such as creams and gels.

To operate, the machine is connected to an air compressor. The intake tubing can be connected to a tank outlet or immersed directly in the product. The volume to be dispensed is adjusted by turning a hand wheel. The speed of the machine can also be easily adjusted. Containers (one at a time) are placed under the filling nozzle. The foot pedal is pressed and the machine starts to fill. Depending upon the product, volume and size opening, 10 to 40 containers per minute can be filled.

HOW IT WORKS

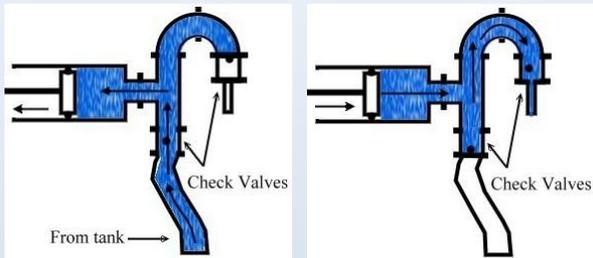

Each fill cycle starts as follows. The piston (inside the fill cylinder) takes an intake stroke. It draws product through the intake tubing, opening the lower check valve and closing the upper check valve. Then the piston moves the product from the cylinder by opening the upper check valve and closing the lower one. Piston filling is simple, time proven and very accurate.



Quart model



Gallon model




3 cylinder automatic



6 cylinder automatic

FLO-MASTER JR

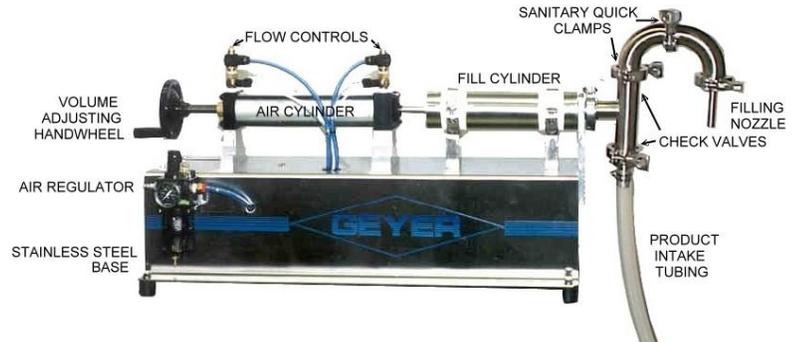

STANDARD FEATURES:

Type 304 stainless steel and FDA plastic product contact parts, cylinder, piston, nozzle, air cylinder for piston, (2) food grade check valves, anodized base plate with stainless steel side panels, volume adjustment, 8 ft. flexible tubing, air filter-regulator, foot switch.

OPTIONS:

Positive cut-off nozzle, floor stand, diving nozzle mechanism, conveyor with indexing system, heated tubing, micro-fill adjustment, etc.

SPECIFICATIONS:

Dimensions:	30" long x 8" wide x 16" high
Weight:	35 lbs.
Compressed Air:	1-2 cfm @80 psi
Fill Range:	.25 - 8 fl. oz.*
	(*additional size cylinders are available)



SINCE 1914

Philapack, LLC

1840 County Line Rd., #203, Huntingdon Valley, PA 19006


Ph. 215-322-2122 Fax 215-355-1509

www.philapack.com

Optional Accessories



with hopper

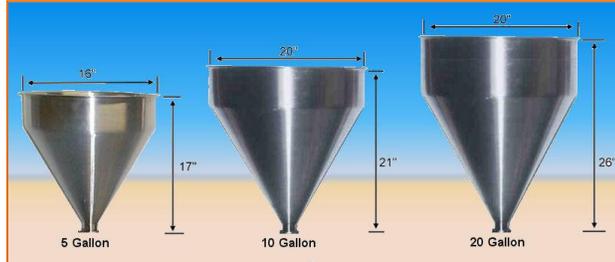

5, 10 and 20 gallon hoppers




Positive cut-off nozzles



On floor stand



Hand activated nozzle

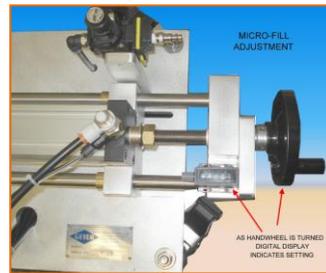

Micro-fill adjustment



Single/Continuous Cycle Switch



With 4 ft. ss container track



Supply Tanks



Plastic tube sealer



Diving nozzle mechanism



Conveyors



Container Indexers



Cap Tightener



Table top labeler